
Evaluation and Acceptance of Precast Drainage Products





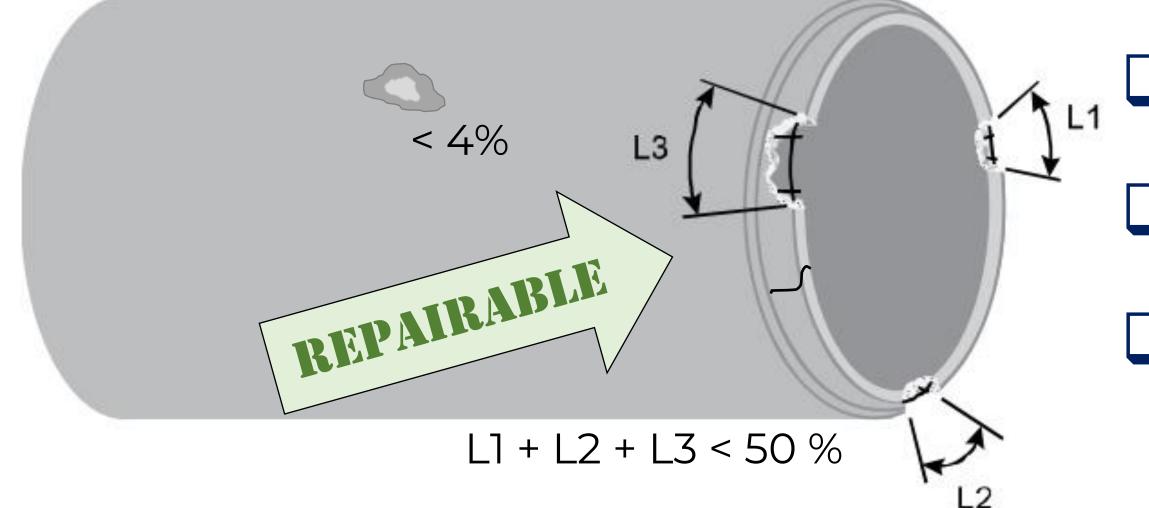

TDOT SOP 5-3 details specific repair requirements.

Repairs must:

- Be judged repairable per AASHTO R73
- I Not damage reinforcement
- Meet strength
- Not change the dimensional requirements of product
- Become an integral part of the product

0.05-1.00mm 20 BLATT

Be recorded and clearly marked as repaired



REJECTED		- CHOICE.
		<complex-block></complex-block>
	REJECTED	MET ANT 17 CZ. (481 GF.)

