


INLETS IN STORM SEWER DESIGN

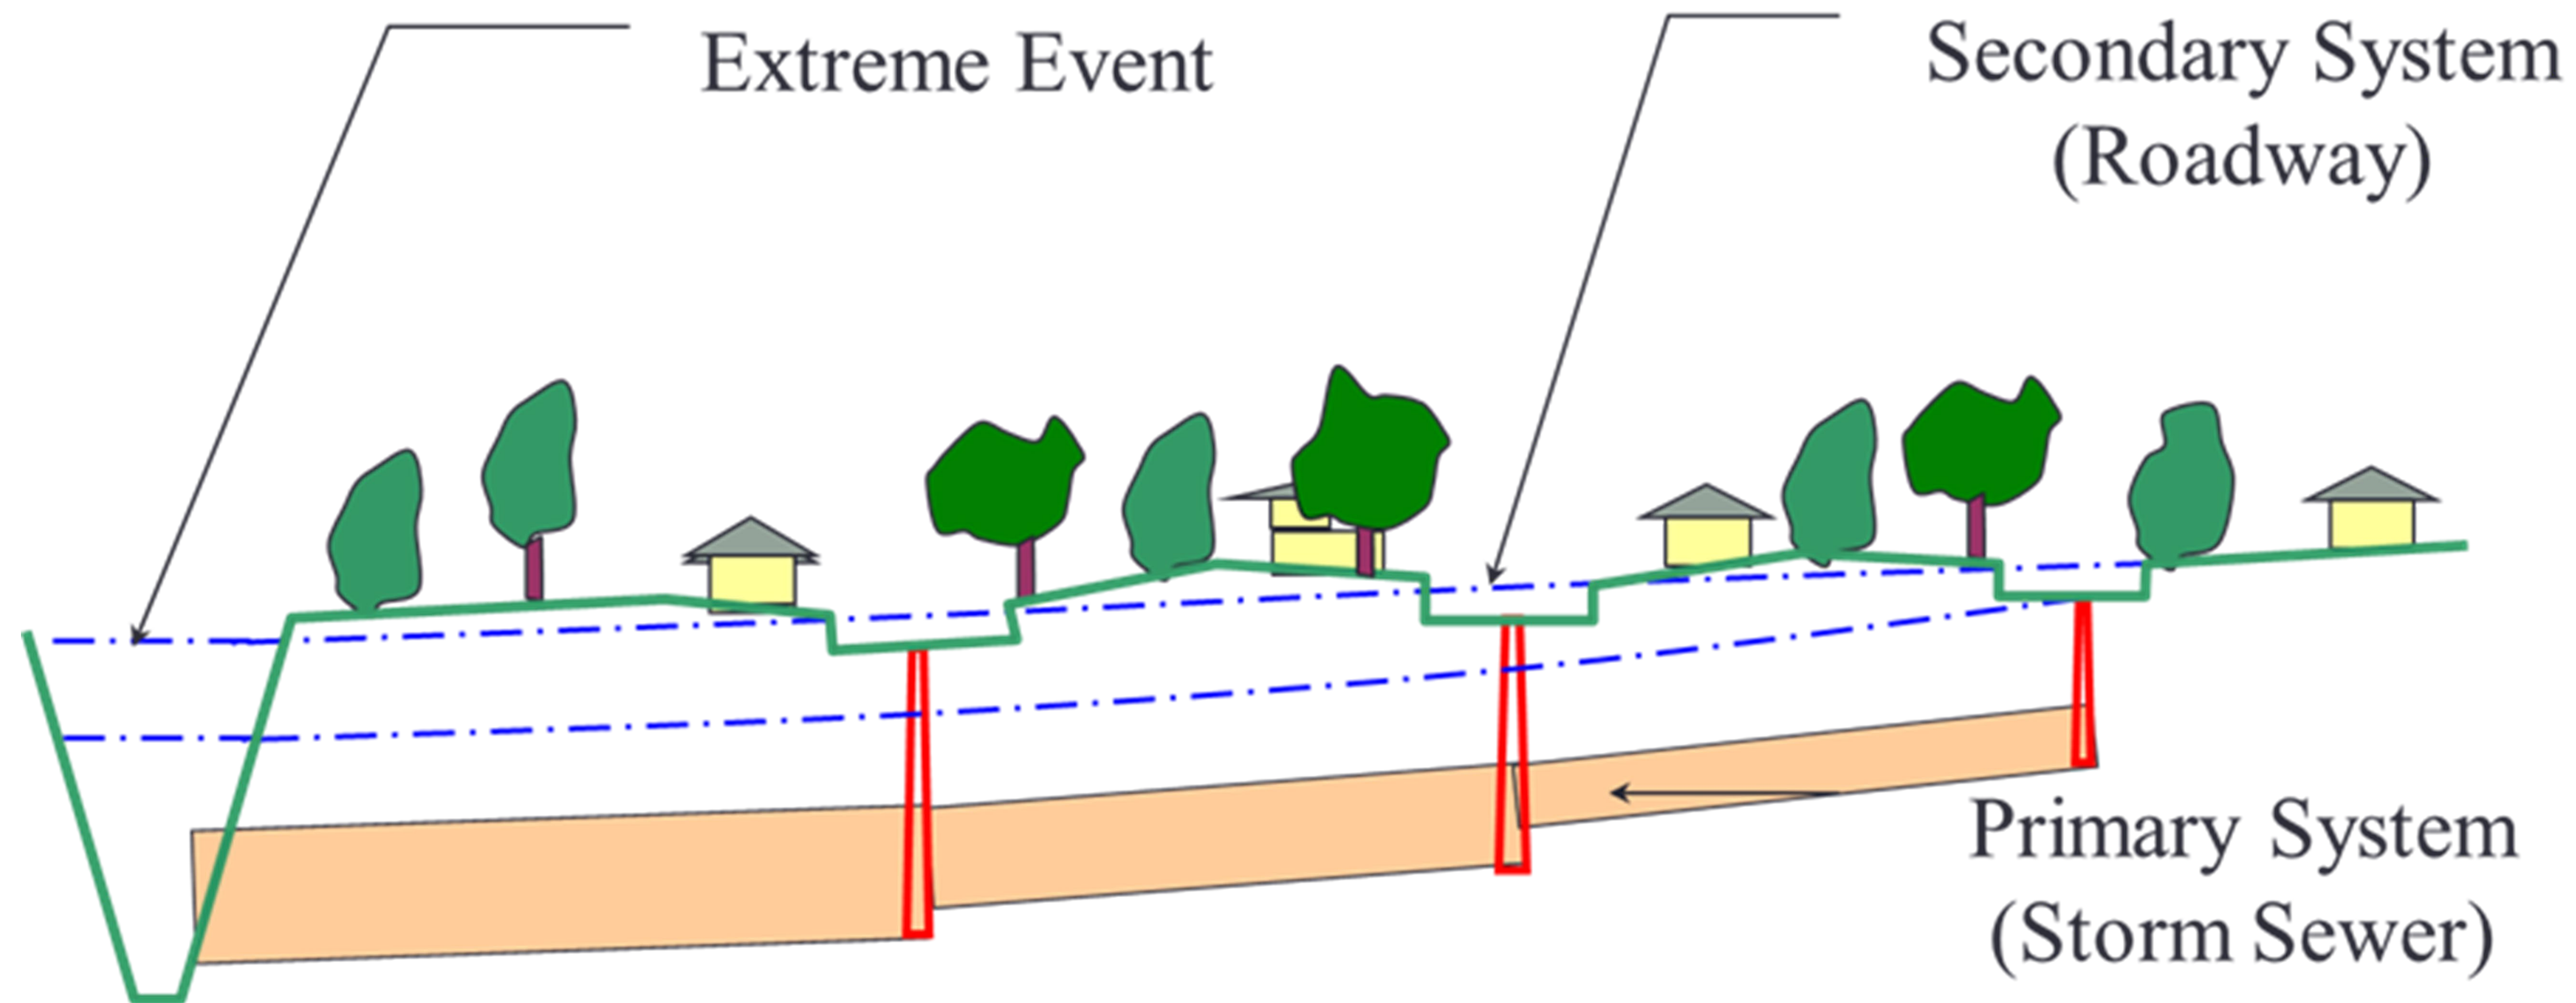

PLACEMENT

PLACE A DROP INLET AT THE POINT OF CURVATURE AND/OR THE POINT OF TANGENT ON A ROADWAY

ALIGNMENT

WHERE POSSIBLE, STORM SEWERS SHOULD BE STRAIGHT BETWEEN ACCESS HOLES. HOWEVER, CURVED STORM SEWERS ARE PERMITTED (WHERE NECESSARY) TO CONFORM TO STREET LAYOUT OR AVOID OBSTRUCTIONS.

SPACING

SPACING CRITERIA ARE TYPICALLY ESTABLISHED BASED ON A LOCAL AGENCY'S EXPERIENCE AND MAINTENANCE EQUIPMENT LIMITATIONS.