Fill Height vs. Cover

Concrete Pipe

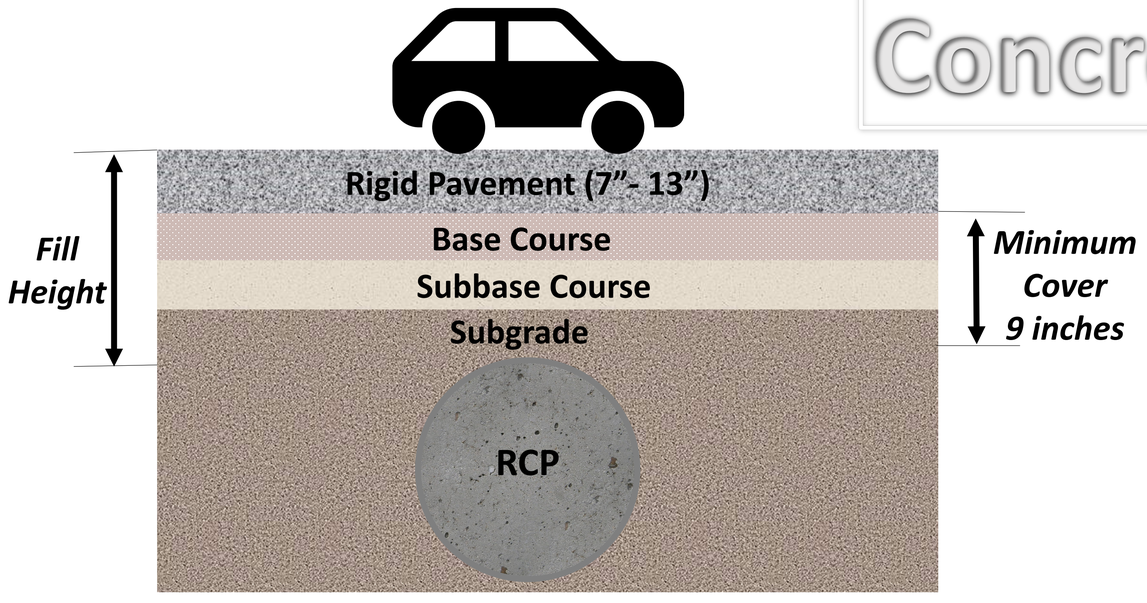

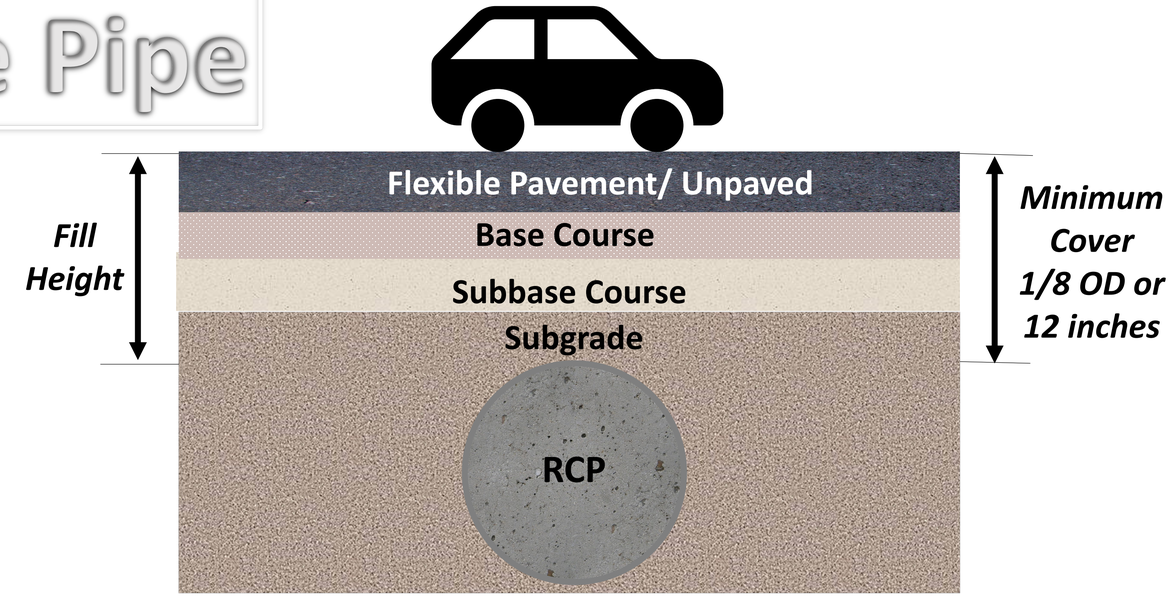

Flexible Pipe

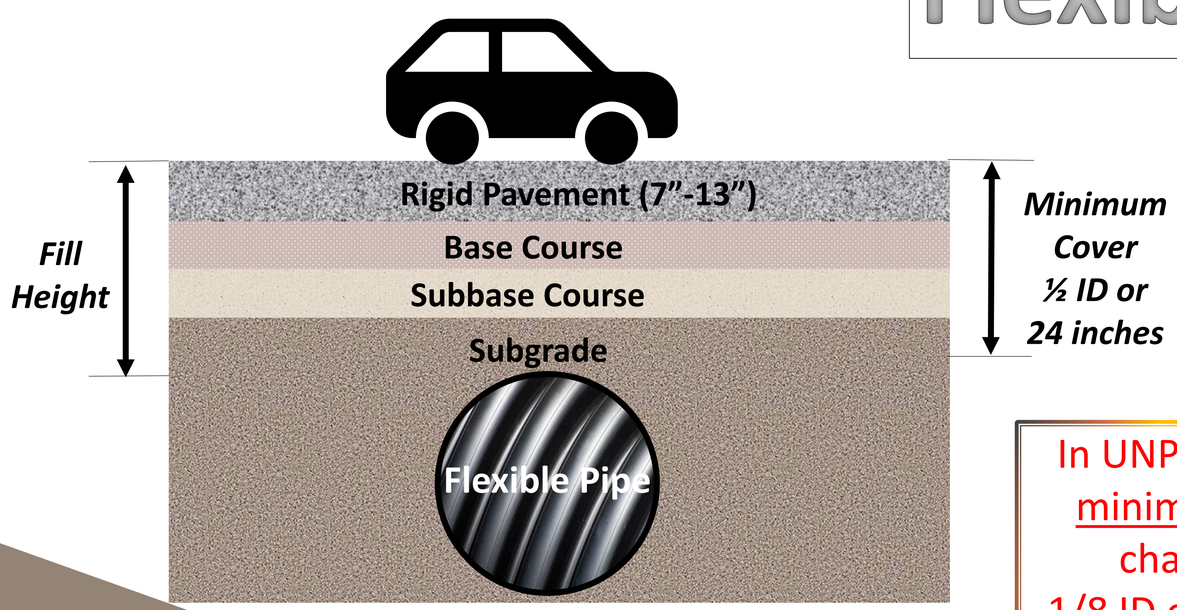

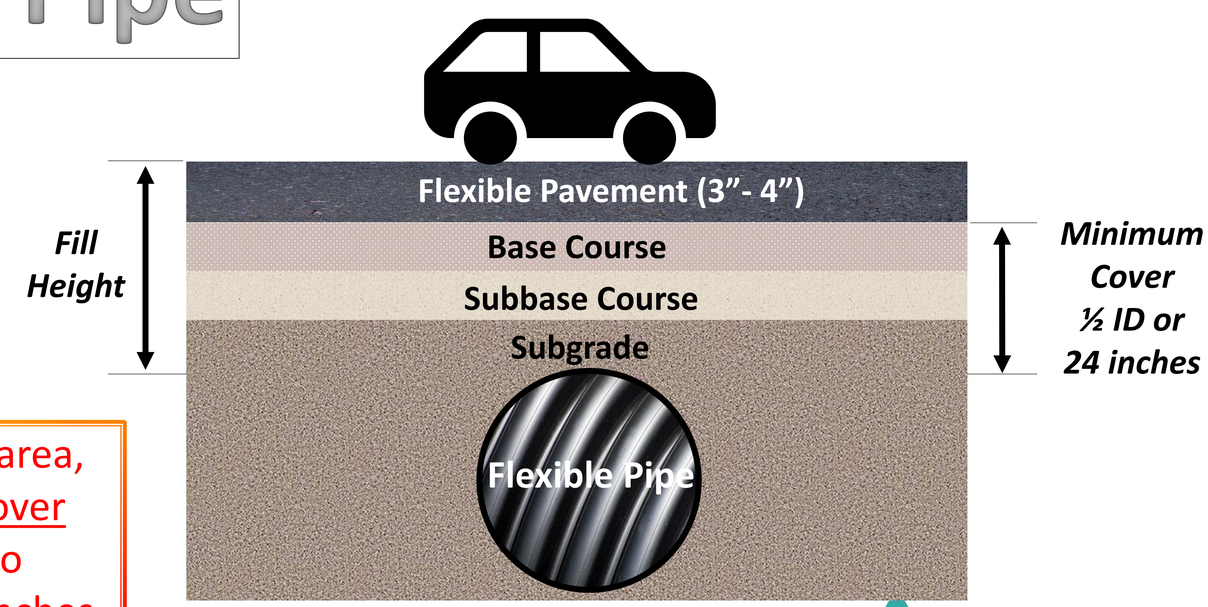

In UNPAVED area, minimum cover changes to 1/8 ID or 12 inches

Section 12.6.6 of the AASHTO LRFD Bridge Design Specifications, 9th Edition

American Concrete Pipe Association